



JWWA G 114  
水道用ダクタイル鋳鉄異形管

単位 mm

記号



御指示品	個数	呼び径		管厚		有効長 L	質量 (kg)	呼び径	
		D	d	T	t			D	d
		100	75	8.5	8.5	400	15.4	100	75
		150	100	9.0	8.5	405	21.0	150	100
		200	100	11.0	10.0	410	27.2	200	100
		200	150	11.0	11.0	415	32.4	200	150
		250	100	12.0	10.0	520	38.6	250	100
		250	150	12.0	11.0	525	44.8	250	150
		250	200	12.0	11.0	530	50.8	250	200
		300	100	12.5	10.0	530	46.3	300	100
		300	150	12.5	11.0	535	52.5	300	150
		300	200	12.5	11.0	540	58.3	300	200
		300	250	12.5	12.0	550	67.8	300	250
		350	150	13.0	11.0	535	62.0	350	150
		350	200	13.0	11.0	540	67.6	350	200
		350	250	13.0	12.0	550	76.9	350	250
		350	300	13.0	12.5	560	85.7	350	300
		400	150	14.0	11.0	645	79.2	400	150
		400	200	14.0	11.0	650	85.7	400	200
		400	250	14.0	12.0	660	96.3	400	250
		400	300	14.0	12.5	670	106	400	300
		400	350	14.0	13.0	670	118	400	350
		450	200	14.5	11.0	660	101	450	200
		450	250	14.5	12.0	670	111	450	250
		450	300	14.5	12.5	680	121	450	300
		450	350	14.5	13.0	680	132	450	350
		450	400	14.5	14.0	690	145	450	400

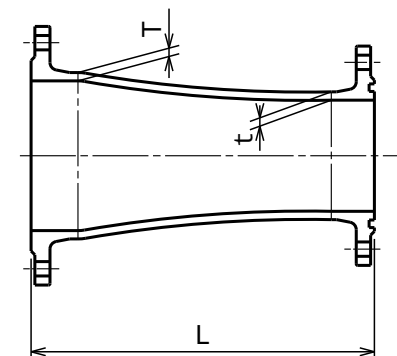

塗装仕様	内面	JWWA G 112 内面エポキシ樹脂粉体塗装	
	外面	JWWA K 139 合成樹脂塗料	
図名	フランジ片落管		7.5K 形式2 100~450
尺度	~	日付	10/12/14
材質	FCD(420-10)	承認	犬塚宣
		検図	小山
		作図	神谷
<b>株式会社ハズ</b>			