



JWWA G 114
水道用ダクタイル鋳鉄異形管

単位 mm

記号



| 御指示品 | 個数 | 呼び径 | | 管厚 | | 有効長 L | 質量 (kg) | 呼び径 | |
|------|----|-----|-----|------|------|----------|------------|-----|-----|
| | | D | d | T | t | | | D | d |
| | | 100 | 75 | 8.5 | 8.5 | 400 | 12.1 | 100 | 75 |
| | | 150 | 100 | 9.0 | 8.5 | 405 | 18.5 | 150 | 100 |
| | | 200 | 100 | 11.0 | 10.0 | 410 | 24.1 | 200 | 100 |
| | | 200 | 150 | 11.0 | 11.0 | 415 | 30.5 | 200 | 150 |
| | | 250 | 100 | 12.0 | 10.0 | 520 | 36.0 | 250 | 100 |
| | | 250 | 150 | 12.0 | 11.0 | 525 | 43.4 | 250 | 150 |
| | | 250 | 200 | 12.0 | 11.0 | 530 | 48.7 | 250 | 200 |
| | | 300 | 100 | 12.5 | 10.0 | 530 | 41.7 | 300 | 100 |
| | | 300 | 150 | 12.5 | 11.0 | 535 | 49.1 | 300 | 150 |
| | | 300 | 200 | 12.5 | 11.0 | 540 | 54.2 | 300 | 200 |
| | | 300 | 250 | 12.5 | 12.0 | 550 | 64.3 | 300 | 250 |
| | | 350 | 150 | 13.0 | 11.0 | 535 | 55.9 | 350 | 150 |
| | | 350 | 200 | 13.0 | 11.0 | 540 | 60.8 | 350 | 200 |
| | | 350 | 250 | 13.0 | 12.0 | 550 | 70.8 | 350 | 250 |
| | | 350 | 300 | 13.0 | 12.5 | 560 | 77.5 | 350 | 300 |
| | | 400 | 150 | 14.0 | 11.0 | 645 | 76.2 | 400 | 150 |
| | | 400 | 200 | 14.0 | 11.0 | 650 | 82.0 | 400 | 200 |
| | | 400 | 250 | 14.0 | 12.0 | 660 | 93.2 | 400 | 250 |
| | | 400 | 300 | 14.0 | 12.5 | 670 | 101 | 400 | 300 |
| | | 400 | 350 | 14.0 | 13.0 | 670 | 110 | 400 | 350 |
| | | 450 | 200 | 14.5 | 11.0 | 660 | 95.7 | 450 | 200 |
| | | 450 | 250 | 14.5 | 12.0 | 670 | 107 | 450 | 250 |
| | | 450 | 300 | 14.5 | 12.5 | 680 | 114 | 450 | 300 |
| | | 450 | 350 | 14.5 | 13.0 | 680 | 123 | 450 | 350 |
| | | 450 | 400 | 14.5 | 14.0 | 690 | 139 | 450 | 400 |

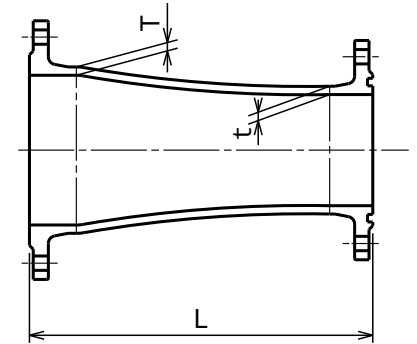

| | | | |
|---------------|-------------|----------------------------|--------------------|
| 塗装仕様 | 内面 | JWWA G 112 内面エポキシ樹脂粉体塗装 | |
| | 外面 | JWWA K 139 合成樹脂塗料 | |
| 図名 | フランジ片落管 | | 10K 形式2 100~450 |
| 尺度 | ~ | 日付 | 10/12/14 |
| 材質 | FCD(420-10) | 承認 | 犬塚宣 |
| | | 検図 | 小山 |
| | | 作図 | 神谷 |
| 株式会社ハズ | | | |