



JWWA G 114
水道用ダクタイル鋳鉄異形管

記号



単位 mm

御指し品	個数	呼び径		管厚		各部寸法		質量 (kg)	呼び径	
		D	d	T	t	C	L2		D	d
		100	75	8.5	8.5	200	550	15.4	100	75
		150	100	9.0	8.5	200	550	21.6	150	100
		200	100	11.0	10.0	200	550	28.5	200	100
		200	150	11.0	11.0	200	555	35.0	200	150
		250	100	12.0	10.0	200	650	38.3	250	100
		250	150	12.0	11.0	200	655	45.8	250	150
		250	200	12.0	11.0	200	660	52.7	250	200
		300	100	12.5	10.0	200	650	44.7	300	100
		300	150	12.5	11.0	200	655	52.2	300	150
		300	200	12.5	11.0	200	660	58.8	300	200
		300	250	12.5	12.0	200	670	68.0	300	250
		350	150	13.0	11.0	200	655	59.2	350	150
		350	200	13.0	11.0	200	660	65.7	350	200
		350	250	13.0	12.0	200	670	74.7	350	250
		350	300	13.0	12.5	200	680	89.3	350	300
		400	150	14.0	11.0	220	775	77.7	400	150
		400	200	14.0	11.0	220	780	85.1	400	200
		400	250	14.0	12.0	220	790	95.3	400	250
		400	300	14.0	12.5	220	800	111	400	300
		400	350	14.0	13.0	220	800	123	400	350
		450	200	14.5	11.0	230	790	96.2	450	200
		450	250	14.5	12.0	230	800	106	450	250
		450	300	14.5	12.5	230	810	122	450	300
		450	350	14.5	13.0	230	810	133	450	350
		450	400	14.5	14.0	230	820	149	450	400

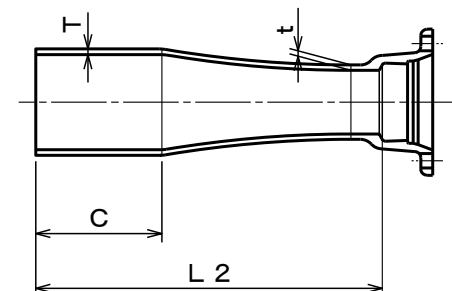

塗装仕様	内面	JWWA G 112 内面エポキシ樹脂粉体塗装			
	外面	JWWA K 139 合成樹脂塗料			
図名	K形 挿し受片落管 75~450				
尺度	~	日付	10/12/10	図番	WAKKSE*0-01
材質	FCD(420-10)	承認	犬塚宣	検図	神谷 作 星野
株式会社ハズ					